RI8604 - 70 to 86 GHz Test Set

Cassini Instrument Profile

Applications

- · Automotive Radar
- Point-to-Point
 Communication
- Ultra Wideband

Overview


The RI8604 Test Set extends the frequency and application capability of Cassini with a 2-port vector analyzer supporting the 70 - 86 GHz band. With bilateral and unilateral waveguide ports, the versatile architecture delivers a precision 2-tone source and measure of signal power, phase, return loss and forward gain sparameters. Designed to integrate with a 20 GHz Cassini source and receiver, the test set instrument enables error-corrected vector measurements as well as absolute power measurements.



Key Features

- Error Corrected S-Parameters from 71 to 86 GHz
- Blind-Mate, RR12 Micro Flange Waveguide Interface
- -110 to +10 dBm Measurement Range
- -85 to +5 dBm Source Range

Block Diagram

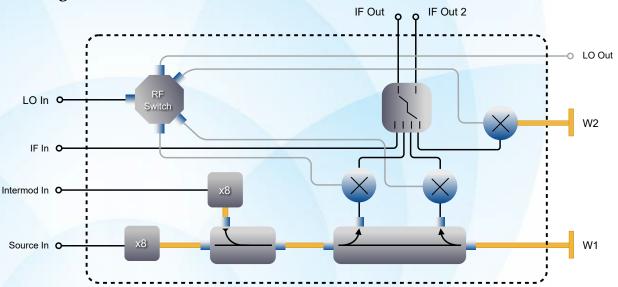



RI8604 - 70 to 86 GHz Test Set

Cassini Instrument Profile

Performance

Sources

Frequency Range 70 GHz to 86 GHz
Frequency Resolution 8 Hz
Power Range(Main) -85 to +5 dBm
Power Range(IM)

Measure

Frequency Range
Power Range¹
Sensitivity (W1)
Sensitivity (W2)

70 GHz to 86 GHz -110 dBm to +10 dBm -110 dBm

Inputs/Outputs



Cassini Test Systems

A versatile, high-speed, automated test solution for analog, mixed-signal, RF, and millimeter-wave devices.

Cassini provides a modular base architecture that is fully configurable via Test Instrument Modules (TIMs) to meet the needs of any IC, wafer, or module test requirement.

Each TIM contains internally-cooled, RF-shielded measurement instrumentation, signal distribution, and blind mate interfacing to provide targeted test resources and integrate to build up a complete production test platform.

Combined with Roos Instruments' integrated test software, Cassini can be configured to any application for maximum performance, true low cost of test, and the industry's fastest test times.

Roos Instruments 2285 Martin Ave. Santa Clara, CA 95050 TEL +1 - 408 - 748 - 8589 sales@roos.com

www.roos.com



ALL PRODUCT, PRODUCT SPECIFICATIONS, AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE PERFORMANCE, FUNCTION, DESIGN, OR OTHERWISE. The information in this publication is, to the best of our knowledge, accurate at the date of publication.

¹ Typical performance with an RI8587 Receiver

⁻¹³⁰ dBm